

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
11 January 2001 (11.01.2001)

PCT

(10) International Publication Number
WO 01/02213 A1

(51) International Patent Classification⁷: **B60N 2/36**

Holland, MI 49424 (US). **WIEDEMAN, Michael, E.**
[US/US]; 2760 Kragspough Ct., Holland, MI 49424 (US).

(21) International Application Number: **PCT/US00/18821**

(22) International Filing Date: **7 July 2000 (07.07.2000)**

(74) Agents: **COX, Jeffrey, M.** et al.; Harness, Dickey &
Pierce, P.L.C., P.O. Box 828, Bloomfield Hills, MI 48303
(US).

(25) Filing Language: **English**

(81) Designated States (*national*): JP, US.

(26) Publication Language: **English**

(30) Priority Data:
60/142,711 **7 July 1999 (07.07.1999)** **US**

(84) Designated States (*regional*): European patent (AT, BE,
CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC,
NL, PT, SE).

(71) Applicant (*for all designated States except US*): **JOHN-
SON CONTROLS INTERIORS TECHNOLOGY
CORP.** [US/US]; One Prince Center, Holland, MI 49423
(US).

Published:





- *With international search report.*
- *Before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments.*

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **HOTARY, James,
T.** [US/US]; 3408 Figueroa Street, Glendale, CA 91206
(US). **BUSCH, David, B.** [US/US]; 16705 Ashley Lane,

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

(54) Title: **SPACE EFFICIENT AND ADAPTABLE VEHICLE INTERIOR**

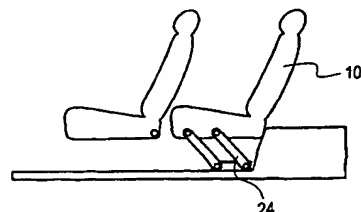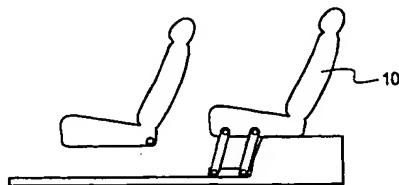

(57) Abstract: A front seat assembly (54) and a rear seat assembly (10) for a vehicle, including a front seat bottom (52) having a front portion and a rear portion, a rear seat bottom (14) having a forward portion and a rearward portion and being connectable to the vehicle for movement between a use position and a stored position, and a support member (82) connected to the front seat bottom and connectable to the vehicle. The support member supports the rear portion of the front seat bottom from the vehicle such that the rear seat bottom may be moved from the use position to the stored position with the forward portion of the rear seat bottom located under the front seat bottom.